



PROBE #4.  
SAWCUT PERIMETER OF THE PROBE  
AREA (2FT X 2 FT) AND REMOVE  
CONCRETE TO EXPOSE TOP  
REINFORCEMENT FOR ENGINEER  
INSPECTION. CONCRETE SHALL BE  
REMOVED 3/4" BEYOND EXISTING  
REINFORCEMENT. RESTORE PROBE AS  
REUIRED AFTER COMPLETION.

PROBES NOTE:  
CONTRACTOR TO PROVIDE CONCRETE CORING  
MACHINE.  
CORES DIAMETER SHALL BE 3 INCH AND PERFORMED  
THROUGH THE FULL DEPTH OF THE SLAB.  
USE PACHOMETER TO DETECT AND AVOID  
REINFORCEMENT DURING DRILLING OPERATION.  
PROBE SHALL BE RESTORED AS REQUIRED AFTER  
COMPLETION OF WORK.  
CONTRACTOR MUST COORDINATE WORK WITH THE  
ENGINEER AND THE VILLAGE OF CROTON.

CORE #1  
AT LOW POINT

CORE #3  
AT HIGH POINT

CORE #2  
AT MID POINT

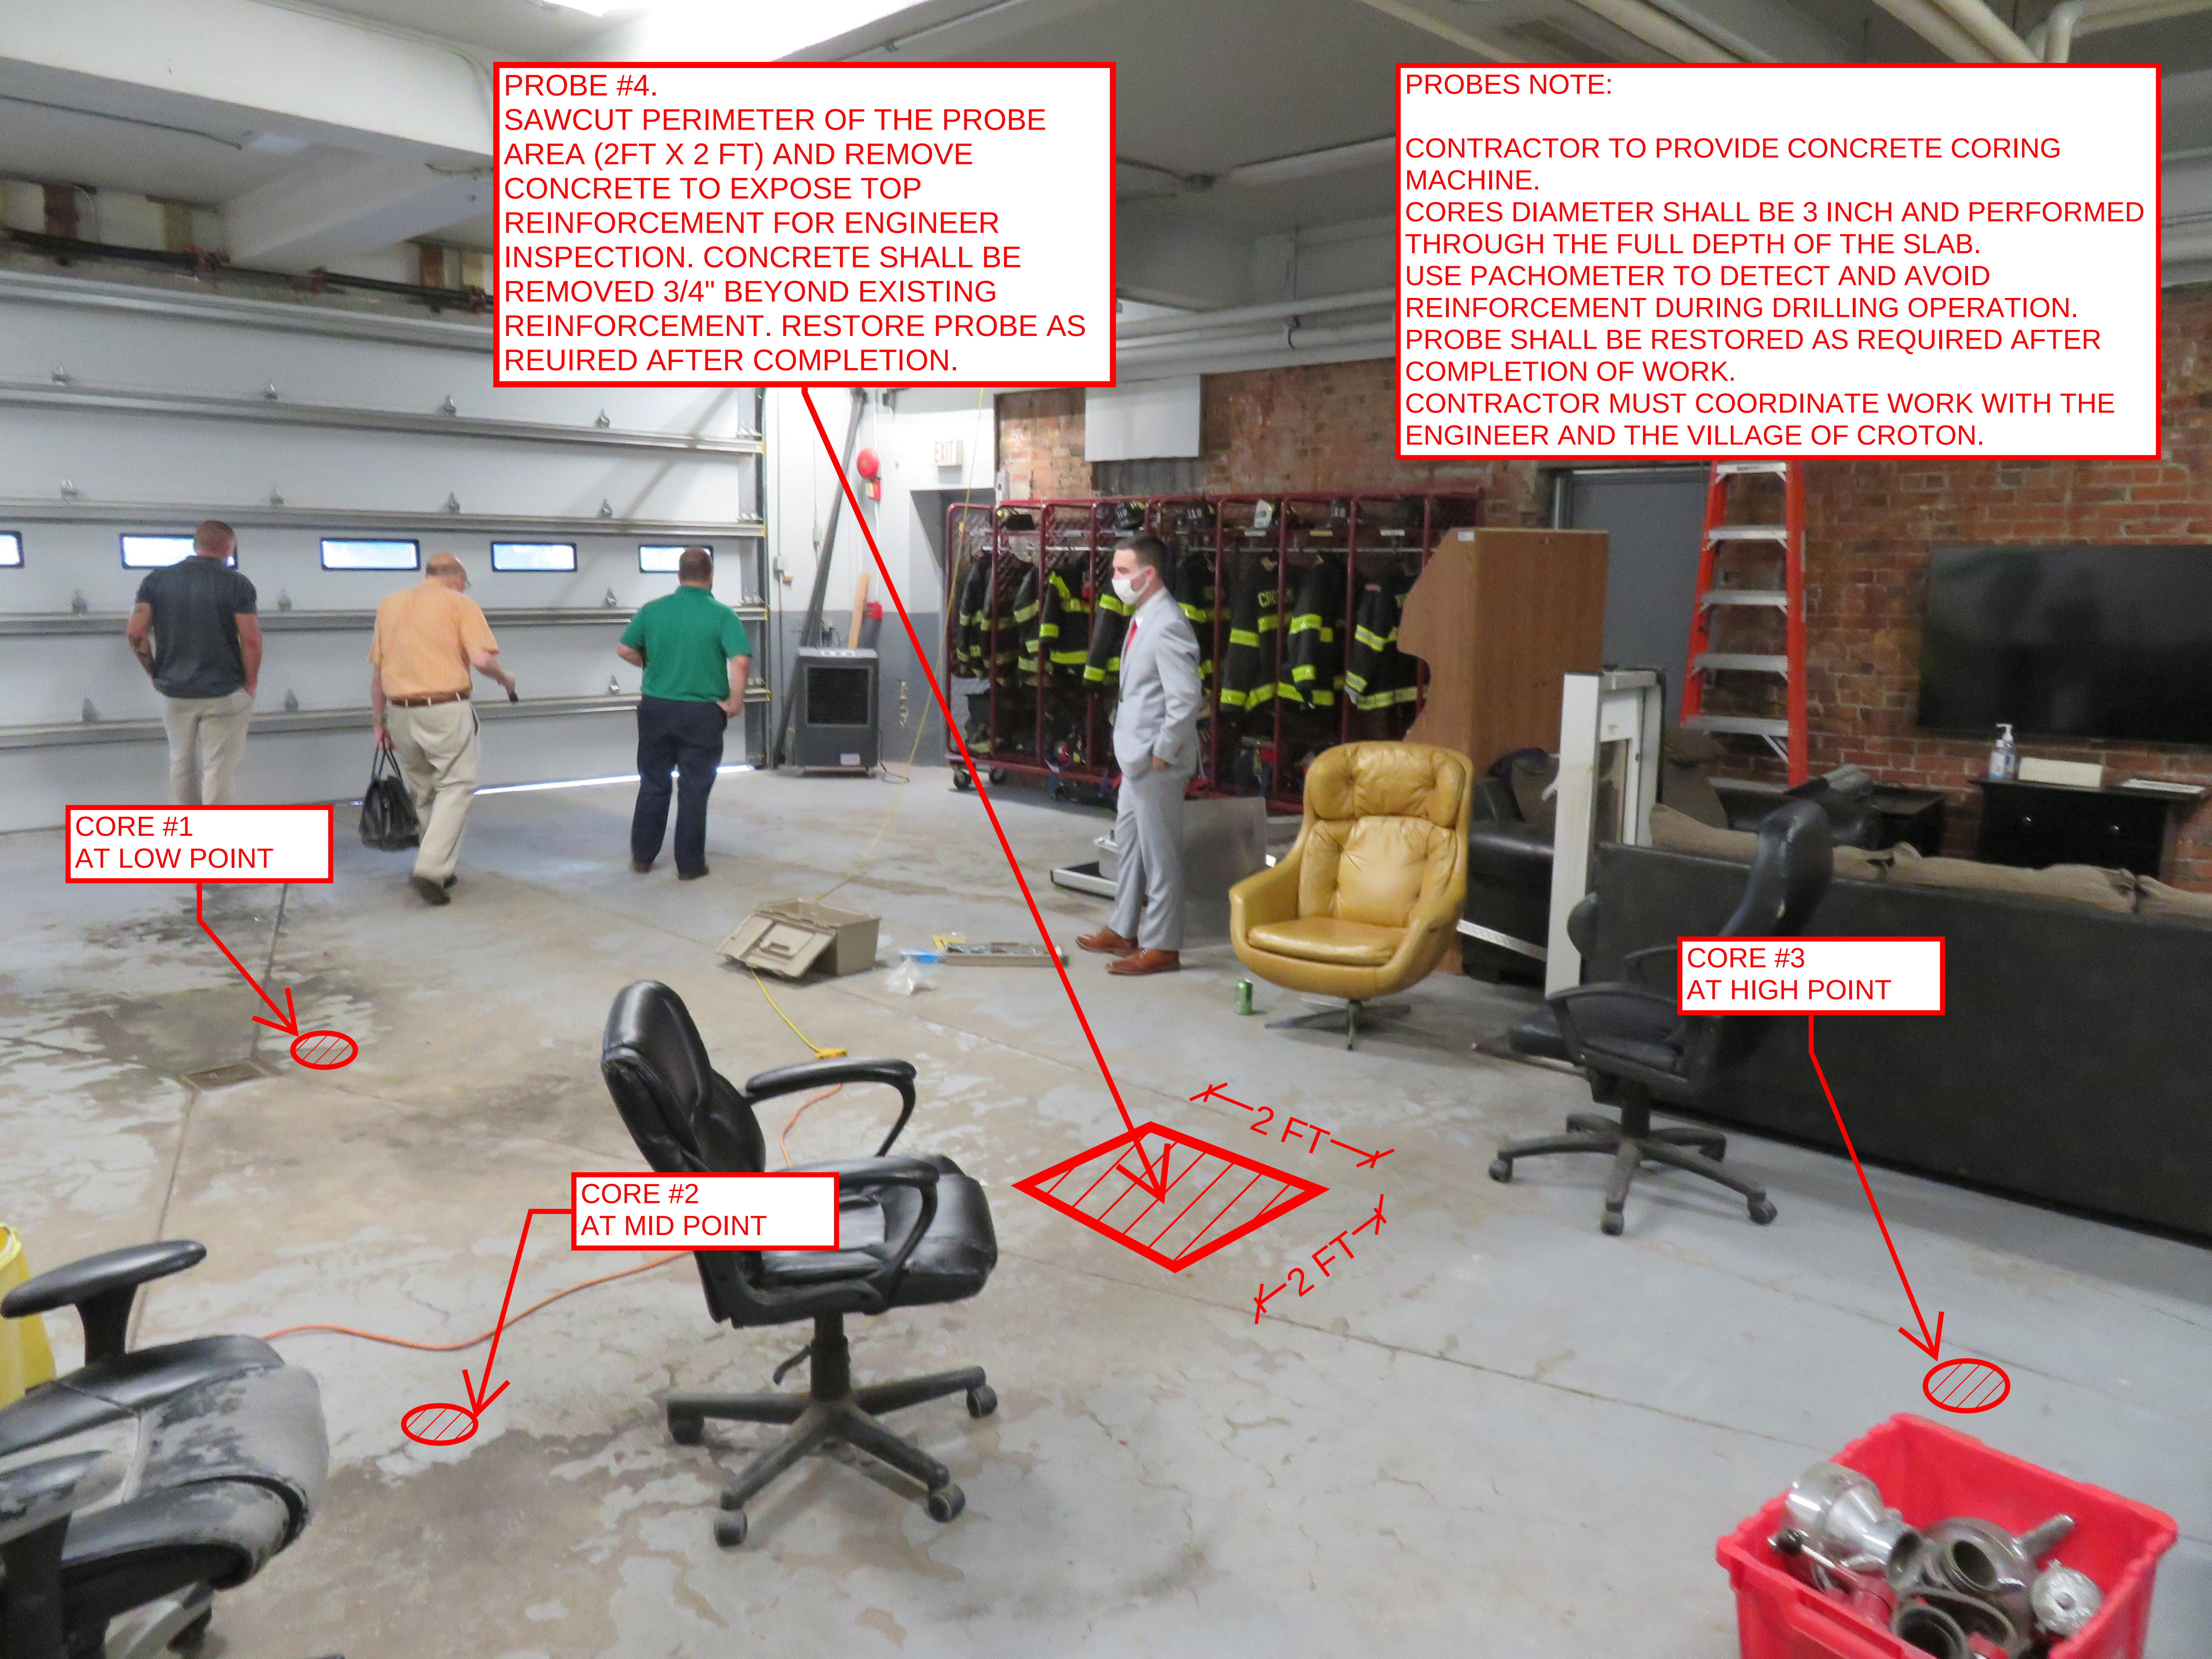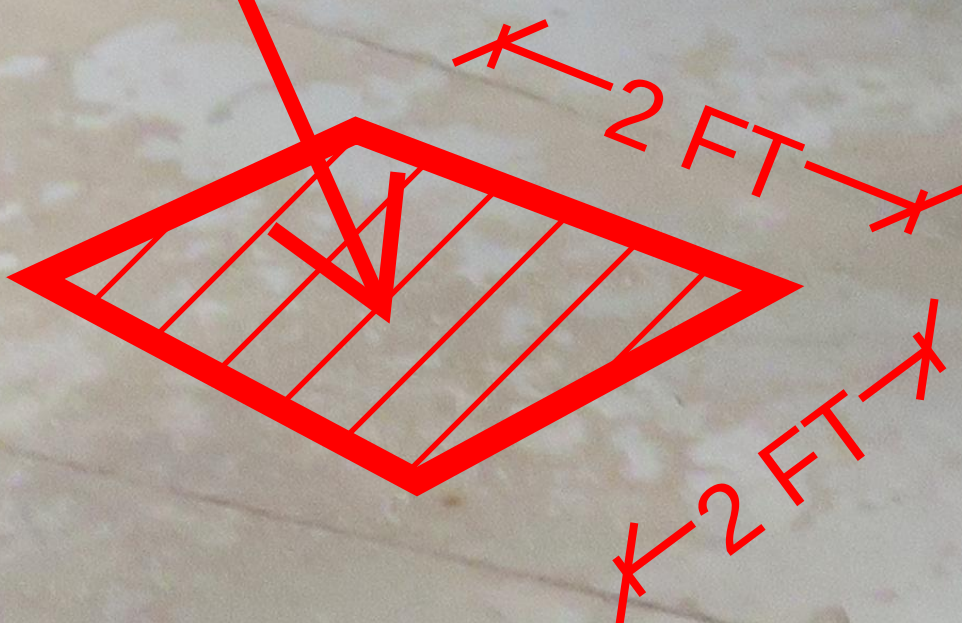

PROBE #5.  
SAWCUT PERIMETER OF THE PROBE  
AREA (2FT X 2 FT) AND REMOVE  
CONCRETE TO EXPOSE BOTTOM  
REINFORCEMENT FOR ENGINEER  
INSPECTION. CONCRETE SHALL BE  
REMOVED 3/4" BEYOND EXISTING  
REINFORCEMENT.  
CONTRACTOR SHALL RESTORE THE  
PROBE AS REQUIRED AFTER  
COMPLETION.

