

James Hardie Welcomes AZEK

AZEK is now part of James Hardie—expanding our portfolio, accelerating innovation, and advancing our shared commitment to sustainability and design.

[Read the Press Release](#)

[Home](#) > [Product Catalog](#) > [Exterior Siding Products](#) > **Hardie® Plank Lap Siding | James Hardie**

Hardie® Plank Lap Siding

Protect and transform your home with our best-selling product line from the #1 brand of fiber cement siding in North America*, available in stunning finishes to suit every style.

 Showing products for: 10598

Hardie® Plank

Find your style



finishes to create your masterpiece.



Individual colors may vary depending on display settings. Samples only available in Select Cedarmill® texture. Please check with your contractor or local dealer for availability in your area.


Select your texture




Select Cedarmill®



Smooth

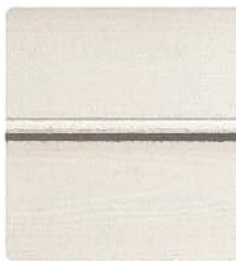

Beaded Select Cedarmill®

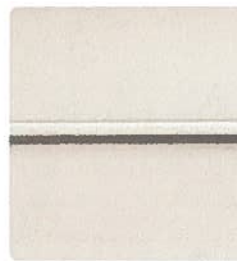

Beaded Smooth



Unav
area

Custc
Rough



Select your color collection

**Statement
Collection®**

Primed for
Paint

❓ Did not find the color you're looking for? [Click here.](#)

color, or approved equal

Gray Slate



Newburgh 10PM 12550

What c...

Newburgh 10PM 12550

Shop All Services

DIY

Log In

/ Doors & Windows / Windows / Single Hung Windows / American Craftsman Single Hung Wind

Internet # 203157301 Model # 50 SH FIN Store SKU # 504552

♥ 240

American Craftsman

35.375 in. x 47.25 in. 50 Series White Single Hung Low-E Argon Glass Vinyl Fin Window with Grids, Screen Incl

★★★★★ (297) Questions & Answers (238)



Hover Image to Zoom

or approved equal.

Share Print

\$239⁰⁰

Pay \$214.00 after \$25 OFF your total qualifying purchase upon opening a new card. [Apply for a Home Depot Consumer Card](#)

- Designed for easy window installation
- Sleek and modern exterior frame enhances curb appeal
- Made of easy care, premium vinyl
- [View More Details](#)



Magic Apron Beta



AI-generated responses. [More information](#)

Hi! Need help with a product, project, or question? I'm here to assist. What can I help you with today?

What are the key features?

What is the warranty on this item?

What are the delivery options for this item?

Feedback

Ask a question

CULTEC Recharger® 180HD Residential Drainage Chamber

The Recharger® 180HD is a 20" (508 mm) tall, mid-size chamber and is typically used for installations with depth restrictions or when a larger infiltrative area is required. The Recharger® 180HD has the side portal internal manifold feature. HVLV® FC-24 Feed Connectors are inserted into the side portals to create the internal manifold.

Size (L x W x H)	7.33' x 36" x 20" 2.23 m x 914 mm x 508 mm
Installed Length	
R-model as Stand Alone Unit	88"
R-model as Row Starter Unit	82"
E-model as Row Middle Unit	76"
E-model as Row End Unit	82"
Chamber Storage	3.45 ft³/ft 0.32 m³/m 21.81 ft³/unit 0.62 m³/unit
Chamber Weight	45.0 lbs 20.41 kg
Shipping	40 chambers/skid 1,905 lbs/skid 16 skids/48' flatbed
Max. Allowable Cover	12' 3.66 m
Max. Inlet Opening in End Wall	15" HDPE, PVC 375 mm HDPE, PVC
Max. Allowable O.D. in Side Portal	10" HDPE, 12" PVC 250 mm HDPE, 300 mm PVC
Compatible Feed Connector	HVLV FC-24 Feed Connector




Calculations are based on installed chamber length.
All above values are nominal.

Visit our website for more information.



Scan to
Learn More



System Calculator



CAD / PDF Drawings




Installation Instructions




We Have Solutions.

cultec.com
1.800.4.CULTEC

Three View Drawing

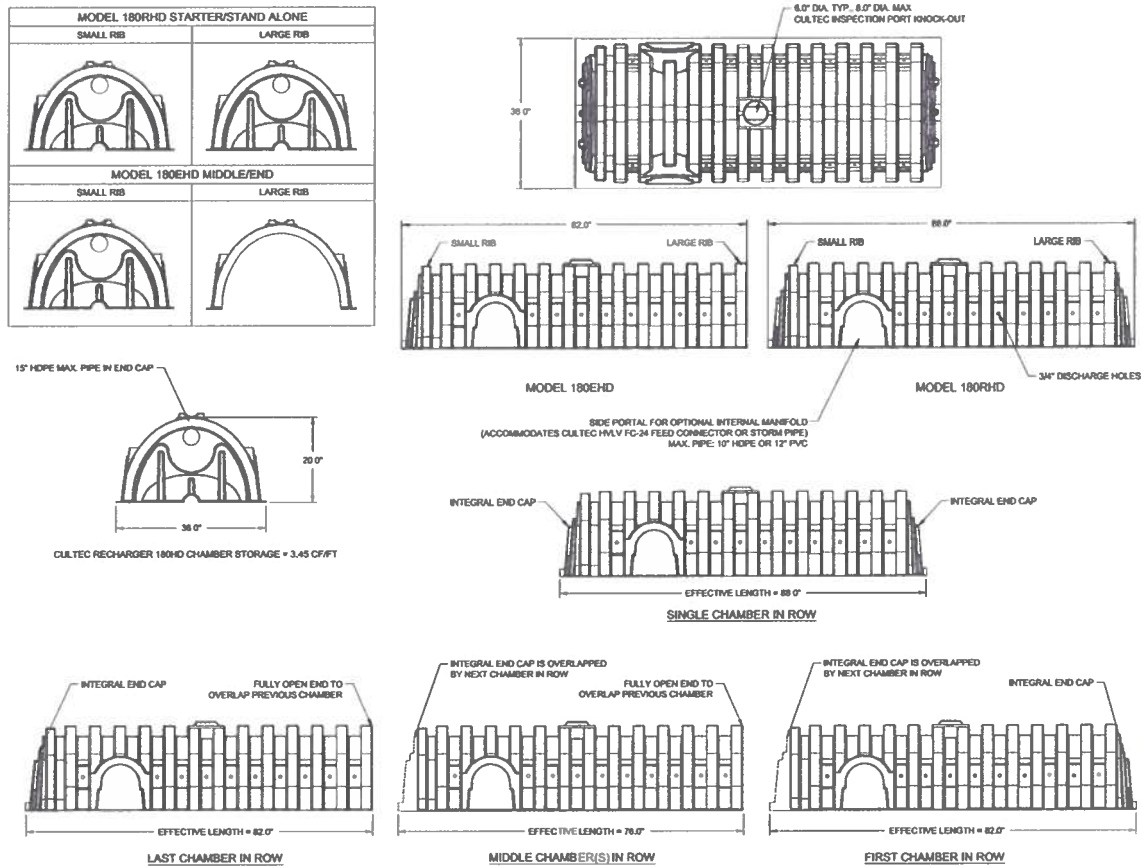

Typical Interlock Installation

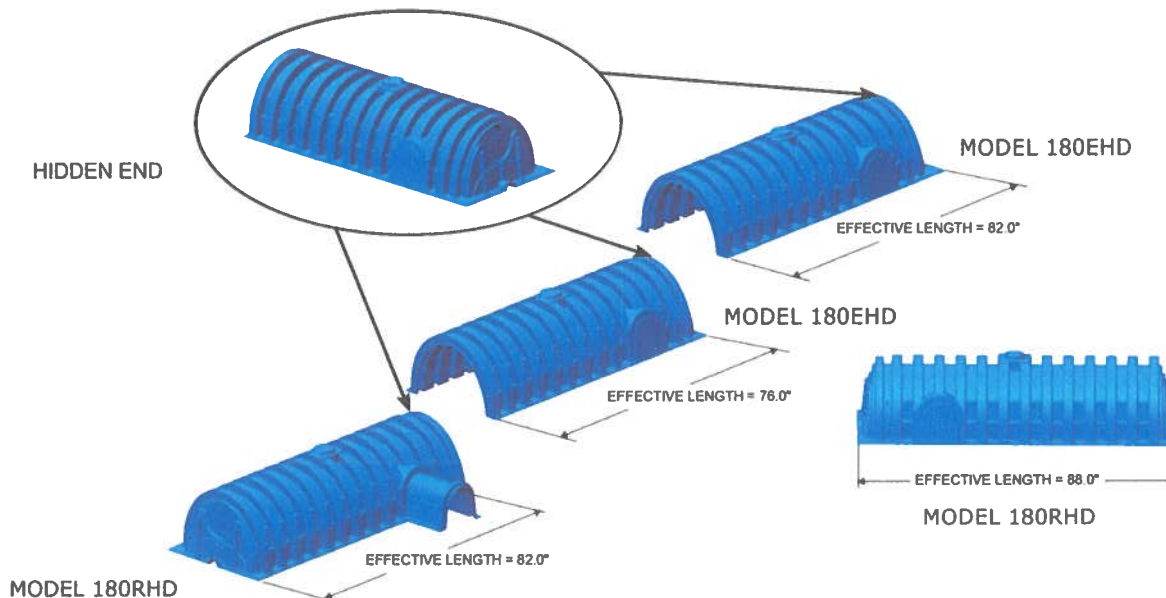


SHOWN WITH SIDE PORTAL TRIMMED AND OPTIONAL CULTEC HVLV FC-24 FEED CONNECTOR INSERTED.

Typical Residential Drainage Details


		Recharger 180HD
Ref.	Bare Chamber Volume	3.45 ft ³ /ft 21.81 ft ³ /unit 163 gal
A	Stone Border	12"
B	Chamber Width	36"
C	Row Spacing	6"
D	Chamber Height	20"
E	Effective Depth	32"
	Chamber Length*	7.33'

*Chamber length includes integral end walls.

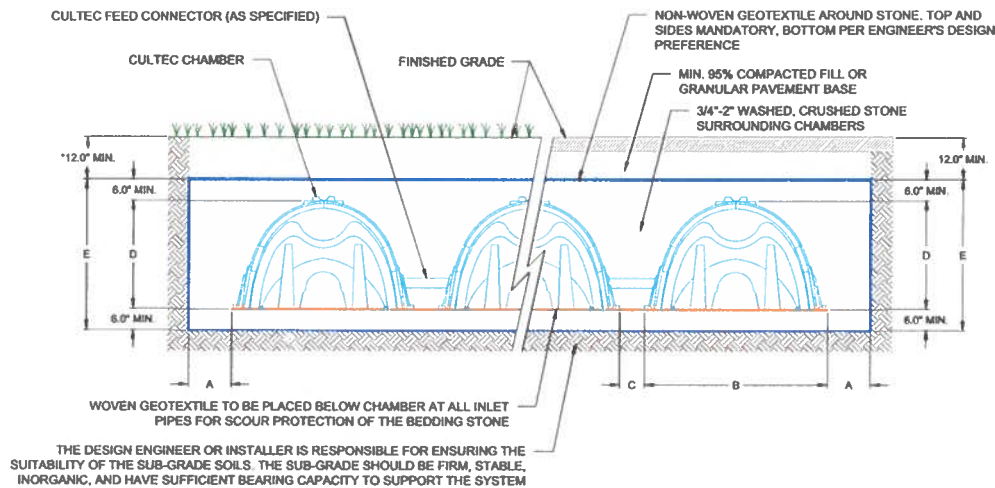

PRODUCT IMAGES ARE FOR ILLUSTRATIVE PURPOSES ONLY.

*FOR NON-TRAFFIC APPLICATIONS, THE DEPTH OF COVER ABOVE THE EMBEDMENT STONE LAYER MAY BE REDUCED TO 6.0"

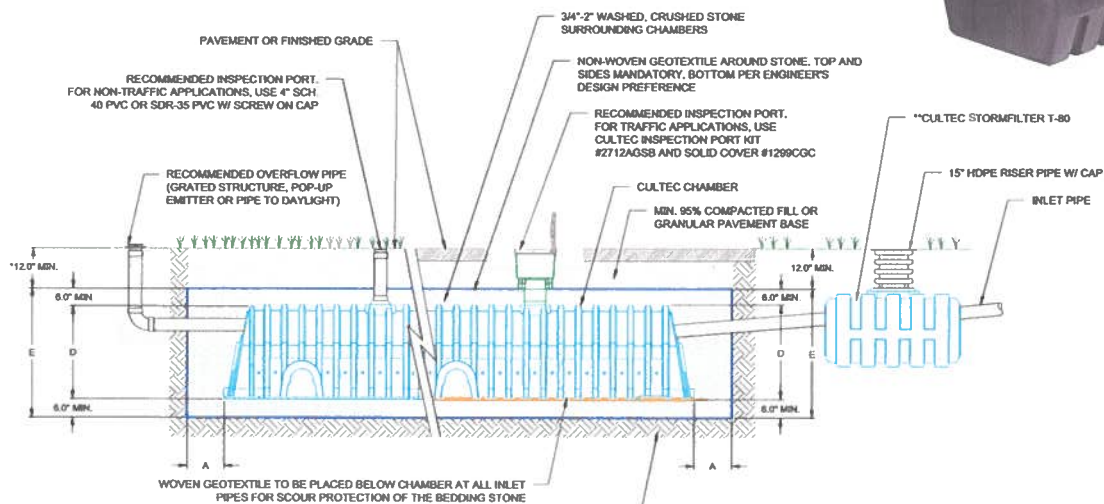

PRODUCT IMAGES ARE FOR ILLUSTRATIVE PURPOSES ONLY.

*FOR NON-TRAFFIC APPLICATIONS, THE DEPTH OF COVER ABOVE THE EMBEDMENT STONE LAYER MAY BE REDUCED TO 6.0"

*CULTEC RECOMMENDS THE USE OF THE STORMFILTER T-80 UPSTREAM OF ALL SYSTEM INLETS. THE STORMFILTER T-80 MUST BE LOCATED IN A NON-TRAFFIC AREA

For more information, contact CULTEC at (203) 775-4416 or visit www.cultec.com.

© CULTEC September 2024 SUB180HD 09-24 180HD RESI submittal