

JTA JOSEPH THOMPSON
ARCHITECT

108 N DIVISION STREET, SUITE 100, PEEKSKILL, NEW YORK 10566

To: **Village of Croton-on-Hudson Planning Board**
1 Van Wyck Street
Croton-on-Hudson, New York 10520

Attn: **Chair Luntz & Planning Board Members**

Date: March 25, 2025

RE: **155 GRAND STREET- EXTERIOR FINISHES NARRATIVE**
155 Grand Street, Croton-on-Hudson, New York 10520 (S-B-L: 67.20-3-12)

Please find a proposed exterior finish specifications package as outlined for the new residence planned for 155 Grand Street below for the Planning Board's review and consideration:

- Windows: Andersen 400 Series Vinyl Clad Double Hung Wood Windows with 2/2 Lite Pattern. Finish: Black
- Entrance Door: Jeldwen Architectural Series Craftsman 4-Lite Style Fiberglass Entrance Door. Finish: Black
- Entrance Door Hardware: Baldwin Lexington Style Entrance. Finish: Oil Rubbed Bronze
- Roofing:
 - Primary Roof GAF Timberline Architectural Roof Shingle. Color: "Slate"
 - Decorative Roofs: MBCI Craftsman Series Standing Seam Metal. Color: Black
- Garage Door: Aamar Carriage Style Steel Overhead Door. Style" Laurelbay with 3-Lite Square Vision Panels. Color: Black
- Shutters: Timberlane Flat 2-Panel. Model: "FP-5"
- Foundation Finish: Superthoroseal textured finish.
- Siding:
 - Board and Batten Style: CertainTeed Vinyl. Color: White
 - Horizontal Clapboard Style: CertainTeed Vinyl. Color: White

We look forward to further reviewing this application with the Board. Please contact me should you have any questions or should any further information be required.

Respectfully Submitted,

Joseph G. Thompson, RA, M. Arch, NCARB, LEED AP, CSBA, CDT
NYS Registered Architect

Attachments: Exterior Specifications (23 Pages)



400 SERIES

WINDOWS & DOORS



* 2018 Contractor Survey of Andersen 400 Series windows.

RELIABLE & ENERGY EFFICIENT

As our most popular and longest-standing products, the 400 Series product line offers a distinct blend of design, reliability and trade confidence. Designed for easy installation for replacement, remodel or new construction projects, 400 Series products feature our Perma-Shield® exterior cladding that revolutionized the window industry. They are also backed by our renowned limited warranty and the largest service network in the industry.

ENERGY-SAVING GLASS FOR ANY CLIMATE

Andersen makes windows and patio doors with options that make them ENERGY STAR® v. 6.0 certified throughout the United States.

Visit andersenwindows.com/energystar for more information and to verify that the product with your glass option is ENERGY STAR certified in your area.



RIGOROUSLY TESTED

The exclusive Andersen® Perma-Shield system gives our windows and doors a tough, protective shell that safeguards the wood inside. It repels water, resists dents* and stays beautiful for years.

OPTIONS FOR THE HARSHEST WEATHER

400 Series windows with Stormwatch® Protection meet building code requirements in coastal areas. Products with Stormwatch Protection are energy efficient, resist the effects of salt water and stand up to hurricane-force winds and wind-borne debris.** For details, visit andersenwindows.com/coastal.



LOW MAINTENANCE, NEVER NEEDS PAINTING

The Perma-Shield exteriors on Andersen 400 Series windows and doors offer superior weather resistance and are virtually maintenance free.

QUALITY SO SOLID, THE WARRANTY IS TRANSFERABLE*

Many other window and door warranties end when a home is sold, but our coverage — 20 years on glass, 10 years on non-glass parts — transfers from each owner to the next. And, because it is not prorated, the coverage offers full benefits, year after year, owner after owner. So it can add real value when you decide to sell your home.

OWNER2OWNER® LIMITED WARRANTY

BUILT FOR YEARS TO COME*

Our products are built strong to last long. We use the right materials in the right places, including solid wood, fiberglass and our own Fibrex® composite material. These give our windows and doors superior strength, stability and long-term beauty.

KEEPS THE WEATHER OUT

Our weather-resistant construction and careful selection of weatherstrip by product type, seals out drafts, wind and water whatever the weather.

* Visit andersenwindows.com/warranty for details.


** Andersen 400 Series casement window, other product performance may vary.



EXTERIOR & INTERIOR OPTIONS


EXTERIOR COLORS

Our Perma-Shield® exterior cladding system, a time-tested Andersen innovation, offers low maintenance and durability while also providing an attractive appearance.

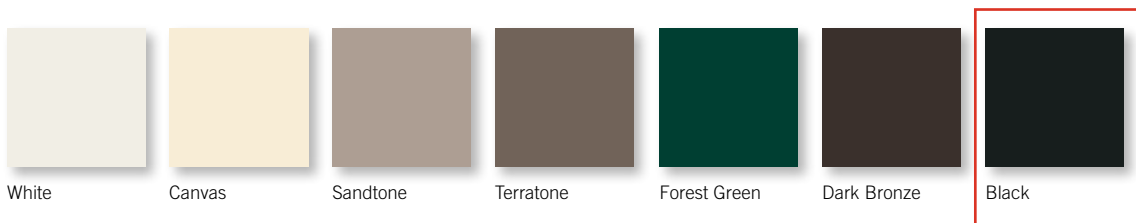

INTERIOR OPTIONS*

Most 400 Series windows are available in unfinished stain-grade pine or with a long-lasting,** low-maintenance white, dark bronze or black finish. 400 Series Woodwright® windows and Frenchwood® patio doors can also be ordered with unfinished oak or maple interiors.

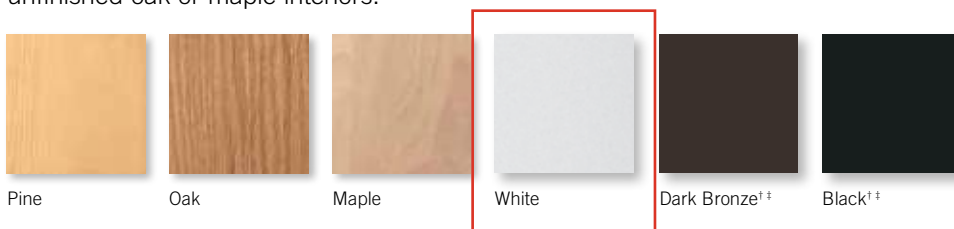

* Some products are not available in all colors or wood species. See your Andersen supplier for details.

** Visit andersenwindows.com/warranty for details.

Printing limitations prevent exact replication of color and finishes. See your Andersen supplier for actual color and finish samples.

† Dark bronze and black interior units have matching exteriors.

‡ Not available on 400 Series Woodwright double-hung windows.

EXTERIOR TRIM SYSTEM

Add curb appeal with Andersen® exterior trim. Our trim is made with Fibrex® composite material, an environmentally smart composite that contains 40% pre-consumer reclaimed wood fiber by weight. For details, see page 175.

Time-saving and cost-effective



Innovative attachment strip

No nail holes, no visible fasteners, no painting



Independent of water management system for easy installation

Style that gets noticed


Our wide trim profiles overlap the window frame to create clean lines without visible sealant joints. Mitered brick mould corners and butt joints on flat casing profiles reflect traditional corner joints.

Sandtone window with cocoa bean trim



Visit andersenwindows.com/exteriortrim to learn more.

TRIM COLORS

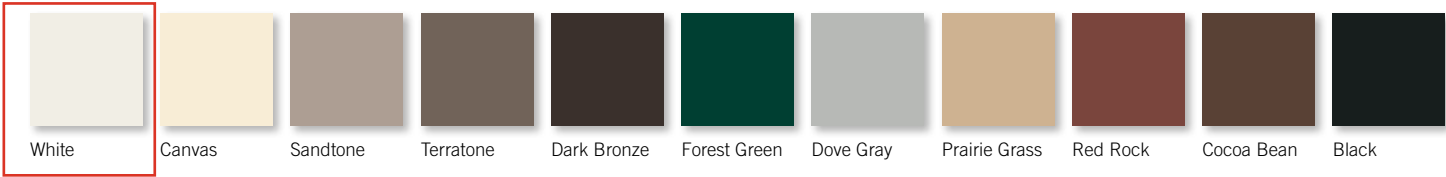

Printing limitations prevent exact color duplication. See your Andersen supplier for actual color samples.



GRILLE OPTIONS

Grille patterns are available in widths and configurations to fit any architectural style or the taste of any customer. We can match virtually any existing grille pattern and we'll even work with you and your customers to create custom patterns.




Permanent exterior
Permanent interior
with spacer

FULL DIVIDED LIGHT

Permanently applied to the exterior and interior of the window with a spacer between the glass.




Permanent exterior
Permanent interior



Permanent exterior
Removable interior

SIMULATED DIVIDED LIGHT

Permanent grilles on the exterior and interior with no spacer between the glass. We also offer permanent exterior grilles with removable interior grilles.



Removable interior



Finelight
Grilles-
Between-
the-Glass*

CONVENIENT CLEANING OPTIONS

Removable interior grilles come off for easy cleaning. Finelight™ grilles-between-the-glass are installed between the glass panes and feature a contoured profile in 1" (25) and 3/4" (19) widths.

GRILLE BAR WIDTHS

Actual size shown.



3/4" (19)



7/8" (22)



1 1/8" (29)



2 1/4" (59)



To see all of the standard patterns available for a specific window, refer to the detailed product sections in this product guide.


* 7/8" (22), 1 1/8" (29) and 2 1/4" (57) not available in Finelight grilles-between-the-glass. Dimensions in parentheses are in millimeters.

Jeldwen Architectural Collection Fiberglass Door- 4-Lite Glass Panel



SHARE

PRINT

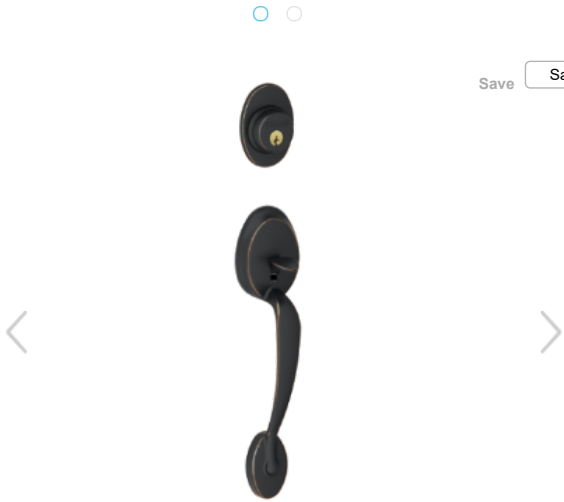

Save

Plymouth In-active Handleset and Siena Knob

F93 PLY 716 SIE

Finish: Aged Bronze



Find a Retailer

Related Products



Siena Knob Hall & Closet Lock



Siena Knob Bed & Bath Lock



Siena Knob Non-turning Lock

FEATURES

SPECIFICATIONS

- Applications: Residential single and multi-family entrance doors.
- Backset: Universal latches and deadbolts fit 2-3/8" (60mm) or 2-3/4" (70mm) backsets.
- Certifications:
 - Commercial Standard Certification:ANSI/BHMA A156.36-2010
 - Residential Standard Certification:ANSI/BHMA A156.40-2015
- Door thickness range: 1-5/8" to 2" thick (41mm-51mm) standard. Thick door kit available.
- Inside Trim: Levers are zinc-based plated to match finishes indicated.
- Keying: FA Series handlesets are 5-pin tumbler with two keys per lock. F-Series handlesets are 6-pin tumbler with two keys per lock.
- Outside Trim: Handlesets are solid forged brass; wrought brass trim rings with concealed security inserts.

HOW-TO CENTER

REVIEWS

This website uses cookies and similar technologies to help us provide you with a good experience when you browse our site, to improve our site, and allows us and our partners to target ads to you. We also share information about your use of our site with our social media, advertising and analytics partners. By closing or clicking ACCEPT you are agreeing to the placement of cookies and similar technologies on your computer by us and our third party partners. [Allegion Cookie Policy](#).

> Cookie Preferences

✓ Accept Cookies

GAF Timberline**HDZ**
High Definition® Lifetime Shingles



America's #1-selling shingle just got better — again

Now with GAF Time-Release Algae-Fighting Technology and LayerLock™ Technology, Timberline HDZ® offers everything you can expect from an architectural shingle roof, and more.




Timberline HDZ® Shingles

Benefits:

- **LayerLock™ Technology** — mechanically fuses the common bond between overlapping shingle layers
- **Up to 99.9% nailing accuracy** — the StrikeZone™ nailing area is so easy to hit that a roofer placed 999 out of 1,000 nails correctly in our test¹
- **WindProven™ Limited Wind Warranty** — when installed with the required combination of GAF Accessories, Timberline HDZ® Shingles are eligible for a wind warranty with no maximum wind speed limitation³
- **Dura Grip™** sealant pairs with the microgranule surface of the StrikeZone™ nailing area. Then, an asphalt to-asphalt monolithic bond cures for durability, strength, and exceptional wind uplift performance.
- **25-year StainGuard Plus™ Algae Protection Limited Warranty** against blue-green algae discoloration.² Proprietary GAF Time-Release Algae-Fighting Technology helps protect your shingles from unsightly stains.
- **For the best look** — use TimberTex® Premium Ridge Cap Shingles or TimberCrest® Premium SBS-Modified Ridge Cap Shingles

Colors:

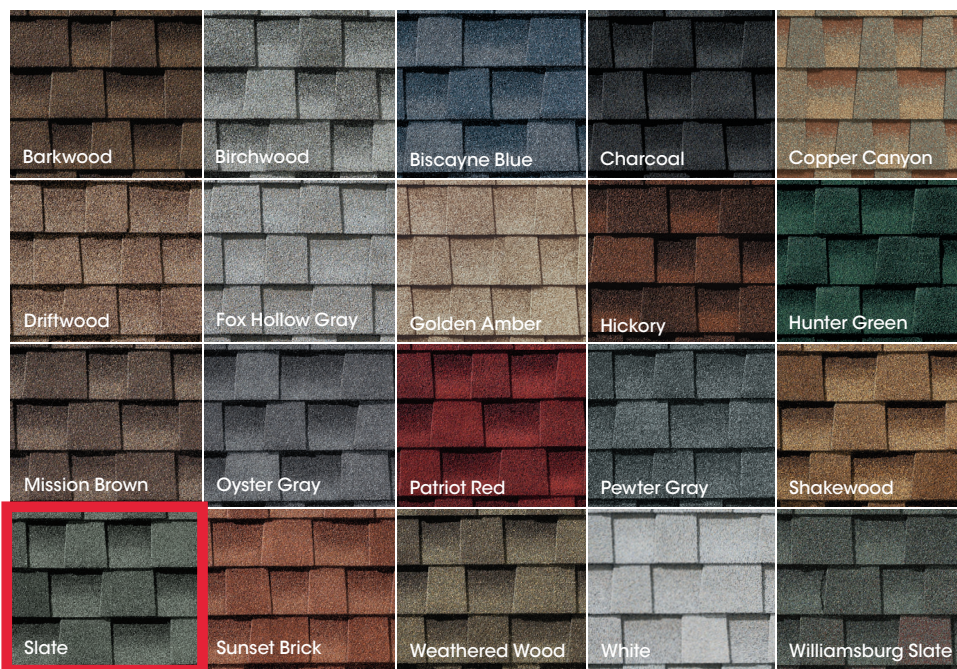

Harvest Blend Colors⁵



Product details:

Product/System Specifics

- Fiberglass asphalt construction
- **Dimensions (approx.):** 13 1/4" x 39 3/8" (337 x 1,000 mm)
- **Exposure:** 5 5/8" (143 mm)
- **Bundles/Square:** 3
- **Pieces/Square:** 64
- **StainGuard Plus™ Algae Protection²** Limited Warranty
- **Hip/Ridge:** TimberTex®; TimberCrest®; Seal-A-Ridge®; Z®Ridge; Ridglass®⁵
- **Starter:** Pro-Start®; QuickStart®; WeatherBlocker™

Applicable Standards & Protocols:

- UL Listed to ANSI/UL 790 Class A
- State of Florida approved
- Classified by UL in accordance with ICC-ES AC438
- Meets ASTM D7158, Class H
- Meets ASTM D3161, Class F
- Meets ASTM D3018, Type 1
- Meets ASTM D3462⁴
- Miami-Dade County Product Control approved
- ICC-ES Evaluation Reports ESR-1475 and ESR-3267
- Meets Texas Department of Insurance Requirements
- Rated by the CRRC; Can be used to comply with Title 24 Cool Roof requirements (some colors)

¹ Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles only. See the *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products. Lifetime coverage on shingles and accessories requires the use of any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories. See the *GAF Roofing System Limited Warranty* for complete coverage and restrictions. For installations not eligible for the *GAF Roofing System Limited Warranty*, see the *GAF Shingle & Accessory Limited Warranty*. Visit gaf.com/LRS for qualifying GAF products.

² Results based on study conducted by Home Innovation Research Labs, an independent research lab, comparing installation of Timberline HDZ® Shingles to Timberline HDZ® Shingles on a 16-square foot deck using standard 4-nail nailing pattern under controlled laboratory conditions. Actual results may vary.

³ 25-year StainGuard Plus™ Algae Protection Limited Warranty against blue-green algae discoloration is available only on products sold in packages bearing the StainGuard Plus™ logo. See *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions and qualifying products.

⁴ 15-year WindProven™ limited wind warranty on GAF Shingles with LayerLock™ Technology requires the use of GAF Starter Strips, Roof Deck Protection, Ridge Cap Shingles, and Leak Barrier or Attic Ventilation. See *GAF Roofing System Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products. For installations not eligible for the *GAF Roofing System Limited Warranty*, see the *GAF Shingle & Accessory Limited Warranty*.

⁵ Periodically tested by independent and internal labs to ensure compliance with ASTM D3462 at time of manufacture.

⁶ Harvest Blend colors are only available on TimberTex® Ridge Cap Shingles, Seal-A-Ridge® Ridge Cap Shingles, and TimberCrest® Premium SBS-Modified Ridge Cap Shingles.

Note: It is difficult to reproduce the color clarity and actual color blends of these products. Before selecting your color, please ask to see several full-size shingles.



We protect what matters most™





CONCEALED FASTENING SYSTEMS


CRAFTSMAN™ SERIES

The Craftsman™ Series is a snap-on batten roof system with a concealed clip. The pan and batten are manufactured separately to maximize design flexibility and for ease of installation at difficult hip, valley and slope change conditions.


The Craftsman™ Series is a water-shedding system and can be used for roofs and mansard only when installed over a water-proofed solid substructure with a minimum roof slope of 3:12. The Craftsman™ Series design makes complicated building transitions simple without the necessity of flashings. Slope changes from roof to fascia to soffit can be made with one continuous pan and batten. A concealed clip securely locks the batten to the panel while allowing for expansion and contraction.

Craftsman™ SB is available in a profile suitable for curving in the field or through a third-party vendor contracted by the customer. Please contact your District Sales Manager for order assistance.

SMALL BATTEN (SB)

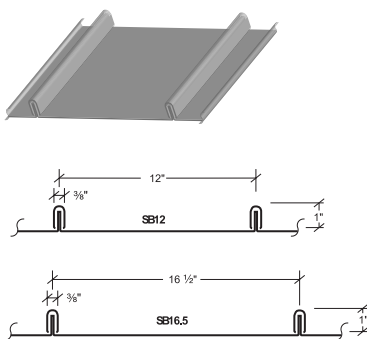

HIGH BATTEN (HB)

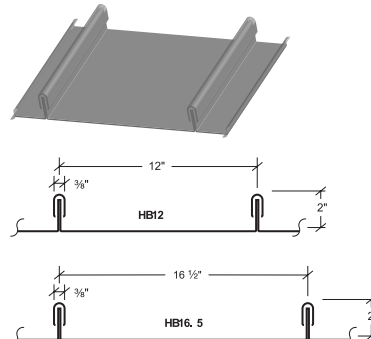

Product Specifications

Applications: Roof and Fascia

Coverage Width: 12", 16 1/2"

Minimum Slope: 3:12

Panel Attachment: Concealed Fastening System

Gauges: 24 (standard); 22, 26 (optional)

Finishes: Smooth (standard); Embossed (optional)

Coatings: Galvalume Plus®, Signature® 200, Signature® 300, Signature® 300 Metallic



CONCEALED FASTENING SYSTEMS

CRAFTSMAN™ SERIES

CATEGORY	TEST METHOD	PURPOSE	RESULT	RESULT
ENVIRONMENTAL	Impact Resistance	UL 2218	Determines Impact Resistance of prepared Roof Covering Materials	Class 4 Rating
	Room Fire Performance	UL 790	Standard for Standard Test Methods for Fire Tests of Roof Coverings	See Class A Fire Rating Data Sheet
FIRE RESISTANCE	Room Fire Performance	UL 263	Standard for Fire Tests of Building Construction and Materials. Requires installation over a non-combustible substrate to qualify for Class A rating. Installation over a combustible substrate qualifies for Class C rating.	"For use in Design Nos. P225, P227, P230, P237, P265, P268, P508, P510, P512, P701, P711, P720, P722, P726, P731, P734, P801, P815, P819.
	Uplift Resistance	ASTM E 1592	Provides a standard procedure to evaluate or confirm structural performance under uniform static air pressure difference	See Load Chart Section
STRUCTURAL	Roof Performance - Underwriters Laboratories	UL 580	Determines the uplift resistance of roof assemblies consisting of the roof and roof coverings materials	Craftsman™ SB - Construction Number 280 and 310. Craftsman™ HB - Construction Number 282 and 309.
	Roof Performance - Florida Approval	UL 580 UL 1897 UL 790	Florida product approval is the approval of products and systems, which comprise the building envelope and structural frame, for compliance with the structural requirements of the Florida Building Code.	See FL# 42381.7 for Craftsman SB See FL#11903.2 for Craftsman HB
	Roof Performance - Texas Department of Insurance	UL 580 UL 1897	TWIA provides windstorm and hail insurance in areas exposed to hurricanes and currently provides windstorm and hail coverage in the following 14 "first tier" Texas coastal counties: Aransas, Brazoria, Calhoun, Cameron, Chambers, Galveston, Jefferson, Kenedy, Kleberg, Matagorda, Nueces, Refugio, San Patricio and Willacy.	See RC-25 for Craftsman SB See RC-527 & RC528 for Craftsman HB

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, MBCI reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at mbci.com. Application details are for illustration purposes only and may not be appropriate for all environmental conditions, building designs or panel profiles. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. If there is a conflict between this manual and project erection drawings, the erection drawings will take precedence.

© 2024 MBCI®, part of Cornerstone Building Brands, Inc. ALL RIGHTS RESERVED. 0706209991113/RevC/MS/0124





Tanglewood design with Closed Arch in Wicker Tan/White with Versailles decorative hardware

AMARR CARRIAGE COURT


Distinctly defined. Amarr Carriage Court garage doors increase a home's curb appeal and the highly defined carriage house designs are easily visible from the end of the driveway.

Built with durable composite overlay trim and insulated steel-backed sections, these garage doors provide energy efficiency, noise reduction and innovative design to your home.


DESIGNS

AVAILABLE WITH WINDOWS


LAURELBAY (LB)




PINETOP (PT)




BRADBERRY (BB)




KENSINGTON (KT)



SEABROOK (SB)




ROSEMONT (RM)




NOT AVAILABLE WITH WINDOWS


ASHLEY (AL)




CHARLTON (CT)




FAIRFIELD (FF)




MIDDLETON (MT)




GREENBRIAR (GB)




DARBY (DB)




NEWBERRY (NB)




TANGLEWOOD (TW)




ARCADIA (AR)*




RAVENWOOD (RW)*



BROOKLAND (BL)*



MAGNOLIA (MG)*



*Closed Square only.

Rosemont
with Closed Square (RM104)Bradberry
with 3 Lite Arch (BB110)Charlton
with Closed Arch (CT105)Laurelbay
with Clear Square (LB115)Darby
with Closed Square (DB104)

CC4000

**Four-Layer:
Overlay + Steel +
Insulation + Steel**

**R-VALUE
6.48**

Designs

A wide variety of unique carriage house designs available in four color options.

See page 30 for complete specifications.

Decorative Options

Choose from a variety of optional decorative windows & hardware to match your home's design.

See p. 6 for window options.
See p. 11 for decorative hardware options.

WARRANTY

- Lifetime limited warranty on finish
- 5-year limited warranty on materials and workmanship
- 5-year limited warranty on hardware
- 10-year limited warranty on window and overlay discoloration
- 5-year limited warranty on overlay delamination

TOP SECTIONS

Available for BRADBERRY, KENSINGTON, LAURELBAY, PINETOP, ROSEMONT AND SEABROOK with CLEAR, OBSCURE or INSULATED GLASS

CLOSED SQUARE (104)



CLOSED ARCH (105)



CLEAR SQUARE (115)



CLEAR ARCH (114)



3 LITE SQUARE (106)



3 LITE ARCH (110)



6 LITE SQUARE (107)



4 LITE ARCH (111)



6 LITE SQUARE (112)



6 LITE ARCH (108)



8 LITE SQUARE (113)



8 LITE ARCH (109)



Available for ARCADIA*, ASHLEY, BROOKLAND*, DARBY, CHARLTON, FAIRFIELD, GREENBRIAR, MAGNOLIA*, MIDDLETON, NEWBERRY, RAVENWOOD* AND TANGLEWOOD

CLOSED SQUARE (104)



CLOSED ARCH (105)



*Closed Square only.

COLORS

Actual paint colors may vary from samples shown.

TRUE WHITE / WHITE (W1)



ALMOND / WHITE (A1)



WICKER TAN / WHITE (K1)



SANDTONE / WHITE (S1)



Door, window, and overlay can be painted using 100% acrylic exterior latex paint with a Light Reflective Value (LRV) of 8 or higher. Contact paint manufacturer for LRV ratings.

Kensington design with Clear Square windows in Almond/White with Blue Ridge decorative hardware



OVERLAY TRIM



- 5/8" thick composite overlay trim of reclaimed wood fiber and thermoplastic polymer
- Coped edge design
- Sustainable, green building material
- Resists rot, decay, and fungal growth
- Won't flake, blister, peel, pit or corrode

WINDOWS



- Large rectangular or arched window designs in 24" top sections
- 5/8" thick decorative window grilles with coped edges
- Available in Clear, Obscure or Insulated glass


DOOR WIDTHS

Only available in widths shown; not available in odd widths

6' WIDE*



12', 14' & 15' WIDE



8', 9' & 10' WIDE



15'6", 15'8", 16' & 18' WIDE



*Available in Ashley, Charlton, Greenbriar and Laurelbay (no window options).

DOOR HEIGHTS

Available in 6'6" - 10' heights in 3" increments†

7' and 8' TALL



9' TALL



10' TALL



†Rosemont not available in 8'3", 8'9", 9'3" and 9'9" door heights; Tanglewood not available in 6'3" and 7'3" door heights.

TIMBERLANE PANEL SHUTTERS

Timeless, Classic Appeal

Choose From 18 Profiles

Timberlane's Panel shutters feature timeless details that have been cherished by many for hundreds of years. From raised and recessed to shaker and flat panel options, there is a surefire shutter style to suit your home's aesthetic. Timberlane uses a craftsman-quality tongue and groove construction to secure the edge of the trim inside the shutter frame, ensuring a snug, long-lasting fit.

Choose from our available panel shutter styles or design your own. If you can dream it, we can build it.

PANEL SHUTTER CUSTOMIZATION OPTIONS

STYLES: Raised Panel, Recessed Panel, Flat Panel

MATERIALS: Endurian®, Premium Wood

**Don't see the custom option you want?
Call us at 800-250-2221**



CB1



CT1



SH1



SH2



SH3



CT3



UB1



CT2



CT4



FP1



FP2



FP3



FP4



FP5



FP6



FP7



VGD



VGV





CONSUMER PRODUCTS

SUPER THOROSEAL® WATERPROOF COATING

Super Thoroseal® Waterproof Coating is a powder, cement-based waterproofing product for protecting concrete and masonry substrates. Easy to use, just add water. Coating can be applied to interiors and exteriors, above or below ground. Weatherproofs, seals out dampness with long lasting, decorative white finish. Resists low level hydrostatic pressures, stops seeping water and cuts radon gas infiltration. Ideal for basement, foundation and retaining walls, concrete planters and walls, stucco, concrete and cinder block, brick, sea walls and piers.

Weather Guidelines

Do not apply to frozen or frost covered walls, or when ambient temperature is below 40°F.

Application Suggestions

Thoroughly dampen the surface to make application of Super Thoroseal® Coating easier. Apply as shown. Use a tampico fiber brush to apply a thick coat. Coverage: 35 lb. container covers up to 105 sq. ft., depending on porosity and texture.

Clean & Prepare Surface

Remove all dirt, loose particles or white powdery deposits (efflorescence) from surface, plus any substance that may prevent maximum adhesion such as paint or oil. Use a mild solution of bleach and water (1 qt. to 5 gals) to remove any mildew, mold or algae from surface. Patch any holes or cracks (including open joints) with Thoro Waterplug®.

Mix Thoroughly

Mix with clean water to a thick "pancake batter" consistency. No more than 1 quart of water per 10 pounds of powder. The brush will stand up in the mixing container when the proper consistency is reached. Let the mixture soak for 15 minutes to fully activate the waterproofing elements. Use within 40 minutes.

Brush it On

Thoroughly dampen surface. Start at the top and work down. Use a tampico fiber brush to apply Super Thoroseal® in a thick coat, working the mixture into the pores of the surface for a good penetrating seal. Double back and use the brush to smooth out the material.



*Must NOT be
applied to
painted surfaces.*

Allow 12 hours between coats for drying time. Lightly dampen wall before applying second coat. Check the mix from time to time for dryness; add just enough water to keep the mix at proper consistency. Use brush to make swirls or textures, if desired. For specific application guidelines, call 1 (216) 839-7171.

Clean-Up, Storage, and Disposal

Clean tools and small spills with warm soapy water immediately after use. Store unused product in its original can, tightly sealed. Protect from freezing. Dispose of this product in accordance with local, state and federal requirements.

Board & Batten

Vertical Siding

Life happens here.™

Siding: Cedar Impressions Double 7" Straight Edge Perfection Shingles in Autumn Red and Board & Batten Single 8" in Savannah Wicker with STONEfaçade® stone veneer in Harbor Sunset.

Traditional Accent

Board & Batten Single 8"

Siding: Monogram Double 4" Clapboard in Midnight Blue and Board & Batten Single 8" in Colonial White.



Siding: CedarBoards Single 12" Board & Batten in Granite Gray.
Trim: Vinyl Carpentry and Restoration Millwork.

Board & Batten Single 12"

Whole House Charm

Board & Batten Single 7"

Siding: Board & Batten Single 7" in Forest.
Trim: Vinyl Carpentry® & Restoration Millwork®.
Roof: Landmark in Sunrise Cedar.



CertainTeed Board & Batten Vertical Siding is better...

...with four great styles to choose from.

	Single 7"	Single 8"	Single 12"	Reverse Single 7"
Length options	★★★★★	★★★★★	★★★★★	★★★★★
Panel width	★★★★★	★★★★★	★★★★★	★★★★★
Flat Face	★★★★★	★★★★★	★★★★★	★★★★★
Crisp design edges	★★★★★	★★★★★	★★★★★	★★★★★
Thickness	★★★★★	★★★★★	★★★★★	★★★★★
Color Options	★★★★★	★★★★★	★★★★★	★★★★★
Texture/finish	★★★★★	★★★★★	★★★★★	★★★★★
Works with standard vinyl accessories	★★★★★	★★★★★	★★★★★	★★★★★
Withstand hurricane force winds	★★★★★	★★★★★	★★★★★	★★★★★
Lifetime limited warranty	★★★★★	★★★★★	★★★★★	★★★★★
Virtually maintenance free	★★★★★	★★★★★	★★★★★	★★★★★
Mix and Match with horizontal vinyl panels	★★★★★	★★★★★	★★★★★	★★★★★

Star Rating Scale: 1=poor | 2=acceptable | 3=good | 4=great | 5=outstanding

...for color availability.

S7" Board & Batten	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
S8" Board & Batten																	●	●	●
CedarBoards™ Single 12" Board & Batten			●														●	●	●
S7" Reverse Board & Batten			●				●				●	●				●	●	●	●
ING ON																			
●	Brownstone*	Melrose*	Autumn Red*	Tuxedo*	Slate*	Espresso*	Sable Brown*	Hearthstone*	Spruce*	Forest*	Midnight Blue*	Pacific Blue*	Wedgewood Blue	Flagstone*	Smoky Gray	Charcoal Gray*	Castle Stone	Granite Gray	Sterling Gray
**Premium Colors *Deluxe Colors																			

**Premium Colors
*Deluxe Colors

COMING
SOON



Siding: Restoration Classic Double 4" Clapboard in Midnight Blue with Northwoods Single 7" Straight Edge Perfection Shingles in Midnight Blue and Granite Gray and Board & Batten S7" in Granite Gray.
Trim: Vinyl Carpentry & Restoration Millwork

Exterior accents

Board & Batten Single 7"

●	●	●			●	●			●
●	●		●	●	●	●	●	●	●
●					●	●			●
					●	●			●
Cypress	Herringbone	Weathered Wood	Sandstone Beige	Desert Tan	Natural Clay	Savannah Wicker	Light Maple	Snow	Colonial White

...for peace of mind.



Warranty

CertainTeed Board & Batten Vertical Siding has a lifetime limited warranty.

#1

Trusted Brand

CertainTeed siding is the brand preferred by building professionals and homeowners, from surveys conducted by national trade magazines. CertainTeed is an industry leader for over 100 years.

Long lasting colors



PermaCOLOR™ System assures color performance, resistance and durability. Utilizing the newest technology and state-of-the-art formulations, CertainTeed backs their vinyl siding with PermaCOLOR Lifetime Fade Protection.

Monogram[®]

Siding

Life happens here.™



RigidForm® 210 Technology

RigidForm 210 double thick .092" rolled-over nail hem technology stiffens the siding for a straighter-on-the-wall appearance. Designed and tested* to withstand wind load pressures up to 210 mph.

*Products adhere to ASTM D3679 standards for capable wind speed ratings based on standard wind load design pressure ratings. For most current ratings, please reference www.certainteed.com.



CertiLock™

This locking system snaps tight for a secure fit.


4" CLAPBOARD



Heavy-duty Thickness

True .046" thickness for outstanding strength and durability.

5" CLAPBOARD

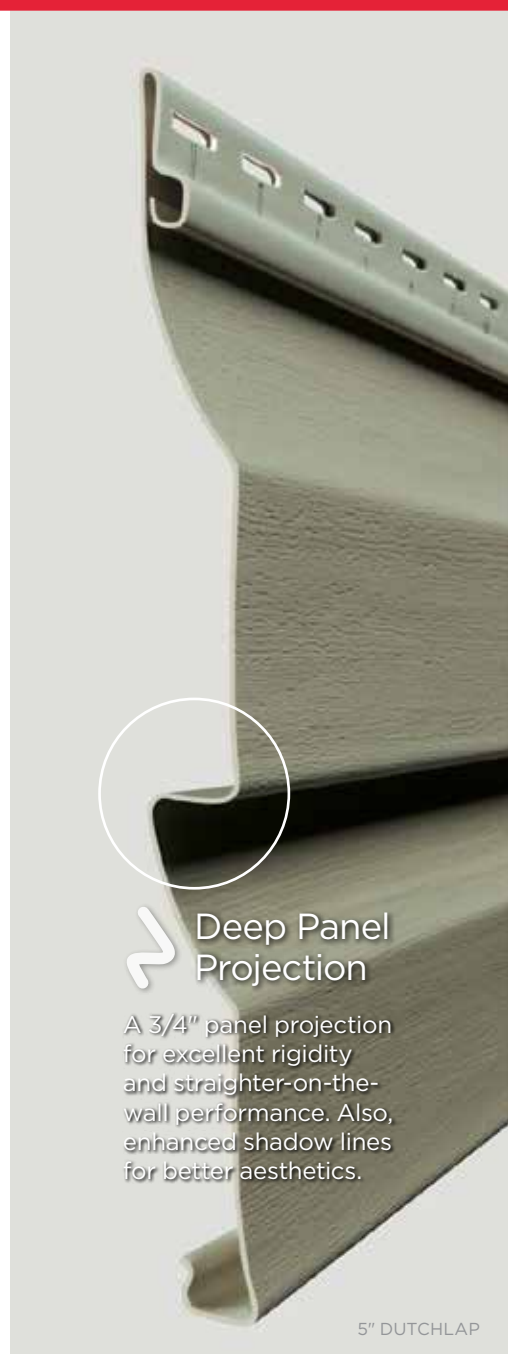

Deep Panel Projection

A 3/4" panel projection for excellent rigidity and straighter-on-the-wall performance. Also, enhanced shadow lines for better aesthetics.

5" DUTCHLAP

3 Styles. Many great features.

Monogram consists of traditional styles with European roots: Clapboard and Dutchlap.

The Clapboard style is the most traditional and found in all parts of the United States.

The Dutchlap style provides strong shadow lines and is highly popular in the Mid-Atlantic region.

4" Clapboard Lap Siding Rough Cedar



5" Clapboard Lap Siding Rough Cedar



5" Dutchlap Lap Siding Rough Cedar



STUDfinder™ is an installation system with letters on the Monogram panel nail hem to ensure proper nailing to wood studs, to protect you from unwanted dangers such as damaged pipes or wires, or exposed nails.



When installed with Monogram siding, CertaWrap™ Weather Resistant Barrier is the added layer of protection against air and moisture damage.

Monogram has a lifetime limited warranty.



CertainTeed siding is the brand preferred by building professionals and homeowners, from surveys conducted by national trade magazines. CertainTeed is an industry leader for over 100 years.



CertainTeed vinyl siding offers significantly lower environmental impact than other cladding options.[†]

Pacific Blue*	•	•	•	•	•	•
Wedge wood Blue						
Flagstone*						
Smoky Gray*					○	○
Charcoal Gray*	•		•	•	•	•
Castle Stone	•		•	•	•	•
Granite Gray	•		•	•	•	•
Sterling Gray	•		•	•	•	•
Oxford Blue	•		•	•	•	•
Seagrass				•	•	•
Cypress	•		•	•	•	•
Herringbone				•	•	•
Sandstone Beige				•	•	•
Desert Tan				•	•	•
Weathered Wood				•	•	•
Natural Clay	•		•	•	•	•
Savannah Wicker	•		•	•	•	•
Light Maple				•	•	•
Buckskin				•	•	•
Heritage Cream						•
Colonial White	•		•	•	•	•